





E-mail: distributor@hyggeraquarium.com

Website: www.hyggeraquarium.com



HG187 USER MANUAL

hygger Broadsword Aquarium Heater

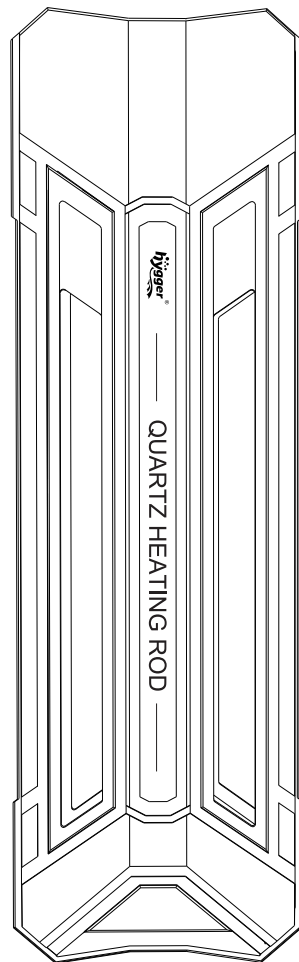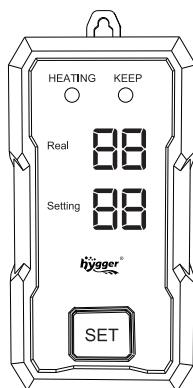


****Reminder: The controller is not waterproof, do not allow it to get wet****



ATTENTIONS

- 1) Place the heater fully submersible when it's on duty. Unplug the heater and wait for 15 minutes before changing the water or removing it.
- 2) Please make sure there is enough water flow and water circulation in your fish tank when using the heater.

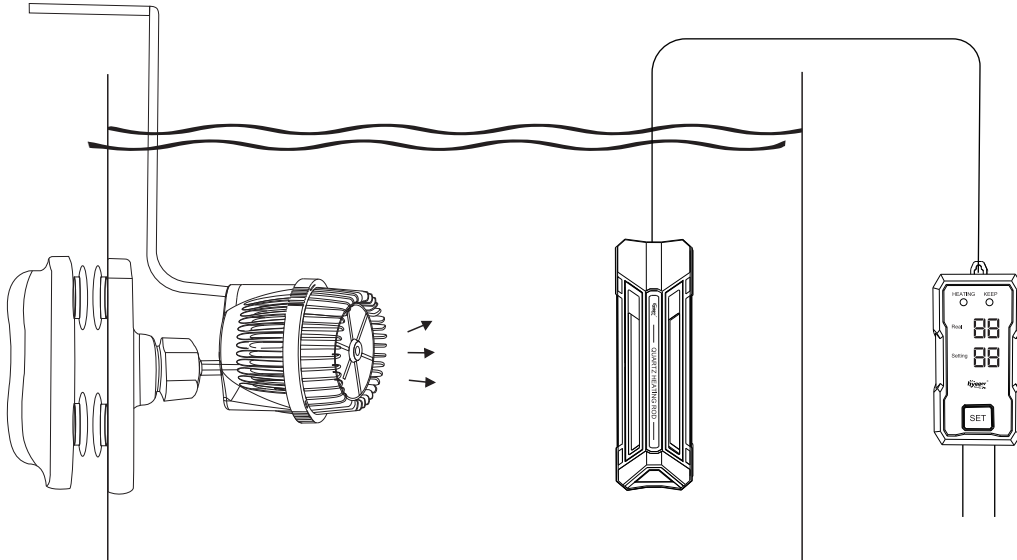

- 3) Please do not bury the heating rod or use it near the sand.

1. PRODUCT FEATURES

Rapid heat accumulation: The heating rod is made of explosion-proof quartz glass material and a high-temperature resistant nickel-chromium heating wire with silicon carbide for efficient heat conduction. This combination ensures fast water heating, offering a safer, more durable, and longer-lasting heating solution. The dual heating rod design further amplifies the heater's power, making it a robust choice for your heating needs.

LED digital temperature display: The LED digital display screen shows the current temperature and preset water temperature in Fahrenheit, along with indicators for high or low temperature warnings. The external controller makes it easy to set and operate the heater. Each touch increments or decrements the set temperature by 1°F(1°C).

Precise temperature control: When the current water temperature is 1°F below the set temperature, it will start heating. Once the water temperature reaches the set temperature, it will stop heating. The heater rod temperature ranges from 59°F(15°C) to a maximum of 93°F(34°C) to ensure safety for livestock and will show an "HH" warning signal when the temperature reaches 94°F(35°C).

Easy operation: Connect the heater to the socket to use it directly. The clear LED display is easy to read and has one key for easy operation.

Auto power off and warning signal: When the heating rod is exposed to air, the heater display shows L1 words and emits a warning signal. When the heating rod is completely immersed in water, it starts working again.

Accurate, reliable and durable: These double quartz tubes are made of premium materials and have a precise scientific design. Our heater provides years of reliable use.

Memory function: The heater maintains its temperature settings even after a power outage and is ready to resume operation once power is restored.


2. PRODUCT SPECIFICATIONS

Model	Voltage/Frequency	Cord length	Applicable tank size
HG187-300W	US standard: AC110~120V/60Hz EU/UK/AU standard: AC220~240V/50Hz Japan standard: AC100-120V 50/60Hz	3.9ft+6.2ft (1.2m+1.9m)	40~80Gal (152~302L)
HG187-500W			66~135Gal (250-343L)
HG187-800W			80~220Gal (302-833L)
HG187-1000W			130-260Gal (492-984L)
HG187-1200W			160-280Gal(600-1060L)

Model	Temp accuracy	Temp Tolerance range	Control range	Heater rod dimension
HG187-300W	1°F(1°C)	±1°F(±1°C)	59°F-93°F (15°C~34°C)	10.6"x3.3"x1" (27X8.4X2.5CM)
HG187-500W				
HG187-800W				
HG187-1000W				
HG187-1200W				

3. INSTRUCTIONS

A) Install the suction cup onto the heater rod, and turn it 90° to secure the cup in place.



B) Connect the heater to the socket to use it directly.

4. MAINTENANCE

- Unplug or switch off all appliances in the aquarium before carrying out maintenance.
- Do not use detergents or other chemical cleaners.
- To clean the heater, unplug it first and then leave the heater in the tank for 15 minutes and remove it from the tank. Wash the heater in clean water.
- When reinstalling the heater, select your desired location and position the heater below the water.
- This appliance has no parts that can be repaired by users.
- For indoor use only, not in the bathroom.

5. TROUBLESHOOTING

Error code	Explanation	Solution
LL	The water temperature in the tank is below 59°F(15°C)	Raise the temperature
HH	The water temperature in the tank reaches 94°F(35°C)	Lower the temperature
EE	Sensor fault	Return to the seller

6. WARNING

To avoid possible electric shock, do not immerse the switch in the water. If the switch falls into the water or becomes wet, do not touch it until you have unplugged it. Basic safety precautions that should be observed are as follows:

1.Read and follow this user manual strictly.

2.DANGER- To avoid possible electric shock, special care should be taken since water is employed in the use of aquarium equipment. For each of the following situations, do not attempt to repair yourself. Instead, return the heater to an authorized service facility for maintenance or discard it.

A.If the heater shows any sign of abnormal working, unplug the power and remove the heater from the water after 15 minutes.

B.Carefully examine the heater after installation. It should not be plugged in if there is water on parts that are not intended to be wet.

C.Do not operate the heater if it has a damaged cord or plug, is malfunctioning, dropped or damaged in any manner. The power cord of this heater cannot be replaced. If the cord is damaged, the heater should be discarded.

D.To avoid the possibility of the heater plug getting wet, position the aquarium and its stand to one side of a wall mounted outlet to prevent water from dripping onto the outlet or plug. A “drip loop”, shown in the figure below, should be arranged by the user for each cord, which connects the heater to the outlet. If an extension cord is used, the “drip loop” is the part of the cord below the level of the outlet or the connector that prevents water from traveling along the cord and coming in contact with the outlet. If the plug or outlet does get wet, DO NOT unplug the cord. Disconnect the fuse to the circuit breaker that supplies power to the heater. Then unplug and examine for the presence of water in the outlet. If you are not sure, consult a certified electrician.

POWER CORD



DRIP LOOP

3.Close supervision is necessary when the heater is used near children.

4.This heater is not allowed to use by persons (including children) with reduced physical sensory or mental capabilities or lack of experience and knowledge unless they have been given supervision or instruction concerning the use of the heater by a person responsible for their safety.

5.To avoid injury, do not contact moving or hot parts.

6.Always unplug the heater from the outlet when not in use, before putting on or taking off parts, maintenance or placing hands in the water. Never yank the cord to pull the plug from the outlet. Grasp the plug and pull to disconnect.

7.Do not use the heater for other than intended use. The use of attachments not recommended or sold by the appliance manufacturer may cause an unsafe condition and will void the warranty.

8.Do not install or store the heater where it will be exposed to extreme weather or temperatures below freezing.

9.Only use the heater in freshwater or saltwater, do not use it in other liquids.

10. Make sure the heater is securely installed before operating it.

11. Read and observe all the important notices on the heater.

12. If an extension cord is necessary, a cord with a proper rating should be used, such as rated amperes or watts. A cord rated for fewer amperes or watts than the heater rating may overheat. Care should be taken to arrange the cord so that it will not be tripped over or pulled.

13. The 2-conductor power cord has a polarized plug (one blade is wider than the other.) As a safety feature, this plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Never use it with an extension cord unless the plug can be fully inserted. Do not attempt to defeat this safety feature.

14. The heater is intended FOR HOUSEHOLD USE ONLY.

15. SAVE THIS USER MANUAL.

7. ATTENTIONS

✓ Please check all the items to inspect their condition when unboxing the package.

✓ Please read this user manual carefully before using and follow it strictly.

✓ Please choose a heater rated for your aquarium.

✓ Please place the heating rod in the way of water flow and don't bury it in the substrate.

✓ It is suggested that the heater is submerged more than 5 inches below the water.

✓ Please make sure the heating rod is fully submerged when it's on duty. Unplug the heater and wait for 15 minutes before changing the water or removing the heater.

✓ Please mind that the heater can be turned off automatically when exposed to air, but it is a last resort and should be avoided.

✓ After using the heater for a while, calcium carbonate contained in algae or moss may clump and adhere to the heating rod.

✓ If dirt adheres to the heating rod, use a sponge or cloth and water to wipe it. Do not use alcohol or other chemicals as this may damage the heater and harm the fish or other livestock.

✓ If you use the heater for a prolonged period with dirt adhered to the heating element, please be aware that failure may occur due to the inability to control the temperature correctly.

✓ Please place the heating rod far away from the magnetic brush since the magnet will possibly damage the heating element.

✓ There will be a little mist on the inner wall of the tube while heating, and it will disappear slowly after the heating stops, which means it's a normal phenomenon. So you don't have to worry about it, it is a safe and double-protected product that has passed the UL certification.

8. HYGGER LIMITED MANUFACTURER'S WARRANTY

We offer the end user of this product a manufacturer warranty of 3 (2) years from the date of sale if this product was purchased from a hygger®-authorised specialist dealer.

Retain receipt for any future warranty claim. Conditions apply. Products are guaranteed by hygger® Aquatic Supplies to the original purchaser against defective material and workmanship under normal use for a period up to 3 (2) years from the date of the original purchase through an Authorized Dealer. Refer to the User Manual included with your product for specific warranty details.

Products have no warranty if:

- 1.) The product has been serviced, modified or tampered with by anyone other than hygger® Aquatic Supplies.
- 2.) The product has been abused or damaged (including broken or cracked bulbs), and/ or.
- 3.) The product has been transported without proper packaging.
- 4.) The product was purchased from an Unauthorized Reseller.

WARRANTY LIABILITY DISCLAIMER

In no event will hygger® be liable for any consequential or incidental damages, including but not limited to, lost aquatic life, personal injury, property damage, equipment damage, lost profits, lost wages, lost savings, lost income, etc., arising out of the use of any hygger® products.

1.0. Terms and Conditions of Warranty.

- 1.1. hygger® warrants to the purchaser, for 3 (2) years from date of original purchase through an Authorized hygger® Reseller, free to repair or replace parts where fault is found due to defective materials or faulty workmanship and where goods do not operate in accordance with the instructions.
- 1.2. All claims for repair or replacement must be made at place of purchase.
- 1.3. Only the direct purchaser is entitled to warranty claims against us and these are not transferable without our consent.
- 1.4. The original and dated Proof of Purchase (receipt) must be supplied with all goods claims. Please also provide this Guarantee where possible.
- 1.5. Wear parts (e.g.: seals, suction devices, axes, pump wheels, light sources, pH electrodes, filter media, such as filter cartridges, as well as UVC burners), glass damage and the opening of the product, as well as structural changes or the use of non-hygger® original parts are excluded from the guarantee.
- 1.6. All goods subject to claim under Guarantee should be prepared for transportation in the original packaging or other comparable packaging which offers the same degree of protection and hygger® must incur no costs from the shipment.
- 1.7. Where claims on inspection reveal goods are in normal working order, hygger® will request reimbursement of all reasonable costs incurred.
- 1.8. Warranty claims do not exist in the case of only insignificant deviations from the agreed or customary condition or usability, e.g. insignificant deviations in colour, dimensions and/or quality or performance characteristics of the products.
- 1.9. Our warranty obligation extends only to the delivery of newly manufactured products. Unless otherwise agreed, used products are sold as seen, excluding any warranty.

For more warranty information, please see the hygger website.

9. PACKING LIST

1x Heater rod
1x Controller holder
3x Suction cup (includes 1pc spare part)
1x Hook
1x User manual

10. CONTACT INFORMATION

Distributed by: Hygger Aquarium, Inc.
13941 Magnolia Ave, Chino, CA 91710

E-mail: distributor@hyggeraquarium.com
Website: www.hyggeraquarium.com

Trademarks of Shenzhen Mago Trading Co., Ltd
Bantian Group Business Center, Longgang,
Shenzhen City, China
All Rights Reserved

Made in China



Have a question? We're here to help:
USA Call: +1 (909) 590-2880
Mon-Fri: 9:00 am - 5:30 pm PST Sat-Sun: Closed

EC	REP	E-CrossStu GmbH Mainzer Landstr.69, Frankfurt am Main, Baden-Württemberg, 60329, Germany E-CrossStu@web.de +49 69332967674
----	-----	--

UK	REP	YH Consulting Limited C/O YH Consulting Limited Office 147, Centurion House, London Road, Staines-upon-Thames, Surrey, TW18 4AX, London H2YHUK@gmail.com +44 07514-677868
----	-----	---



MADE IN CHINA